

# AM-101

## AirMedia® Presentation Gateway




### 1 Introduction

The AirMedia® presentation gateway delivers a simple, low-cost, wireless HD presentation solution.

### 2 Hardware Hookup

Make the necessary connections as called out in the illustration that follows. When making connections to the AM-101, use Crestron® power supplies for Crestron equipment. Apply power after all connections have been made.

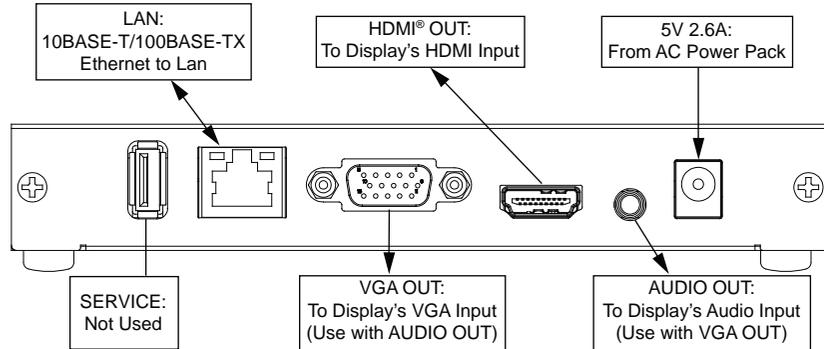

**NOTE:** Typical installation uses only the HDMI® OUT or the VGA OUT-AUDIO OUT connection.

### 3 Share a Presentation

This section provides instructions on sharing a desktop on a display device. For instructions on remotely viewing a shared desktop, refer to section 4 on page 2.

Make all connections as described in "Hardware Hookup" in section 2. The connected display device shows the AM-101 welcome screen.

Address: <http://AirMedia-0cb651> (192.168.0.196) Code: 5918

Find Address Here



To begin your presentation  
enter the address at the top of this screen  
into your web browser.

For mobile devices, download the free Crestron AirMedia App from the App Store™ or Google Play™




### Download the Client Application

The AM-101 uses a client application to share a PC or Mac® (hereafter referred to as "computer") desktop. The computer should be able to access the AM-101 over the network.

**NOTE:** Mobile devices can share content using the AirMedia app, which is available for iOS® and Android™ devices. Download the latest version from the App Store® app in iTunes® software or the Google Play™ store.

1. Open a web browser on the computer, and navigate to the web address or IP address displayed on the top left of the AM-101 welcome screen. The download screen is displayed.

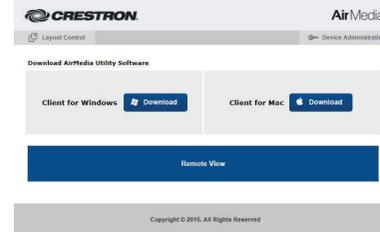


2. Click the **Download** icon for the computer's operating system to download the client application. The client application requires no installation. The application can either be saved and run locally, or run from the Internet.

**NOTE:** When used on a Mac, the AirMedia client application must be run from within the disk image file. Do not drag the application out of the disk image file.

### Share the Computer Desktop

Once the client application is downloaded, content can be shared.

1. Run the client application. The **Login** screen is displayed.



2. Enter the code displayed on the AM-101 welcome screen in the **Code** field and click **Connect**. The client establishes a connection between the computer and the AM-101 while displaying the presentation control screen on the computer.



The contents of the computer screen are shown on the display connected to the AM-101.


3. Direct the presentation with the following controls:

- Stop showing the computer's screen.
- ▶ Start showing the computer's screen.
- || Freeze the computer's screen.
- X Close the client application and the connection between the computer and the AM-101.
- ☰ Display a pop-up menu of additional options. Refer to "Configure Operation" on page 2.
- Minimize the presentation control screen.

### Configure Basic Presentation Settings

Once a link between the computer and the AM-101 has been established, the AM-101 can be configured for the current session. Perform the following steps to configure the AM-101:

1. Click the menu button (☰) to display a pop-up menu.




2. Configure the following options:
  - **Remote View** allows the device to serve images of the desktop to remote viewers via the built-in web server.
  - **Projection Source** (Windows® operating system only) allows the user to share a secondary desktop. This is similar to the Extend mode in Windows for multiple displays.
  - **Projection Quality** improves the quality of the transmitted image but uses more bandwidth. The user's computer should be connected to the AM-101 via a wired Ethernet connection when this setting is used.
  - **Projection Latency Control** reduces the latency of the projected image but is more computationally intense.
  - **Quad View** selects the image position of the screen when multiple PCs are shown on the AM-101.
  - **User Name** sets the name displayed for the user who is showing on the display connected to the AM-101.

### 4 View a Presentation Remotely

This section provides instructions on remotely viewing a shared desktop. For instructions on sharing a desktop, refer to section 3 on page 1.

If Remote View is enabled, audience members can view desktop images via the AM-101's built-in web server. Perform the following steps to remotely view images:


1. Open a web browser on a remote computer, and navigate to the web address or IP address supplied by the user or users that are sharing their desktops. The download screen is displayed.

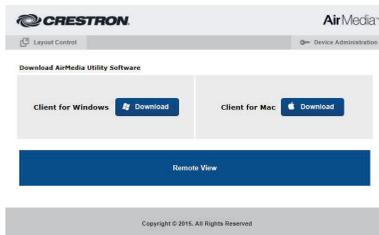

2. Click **Remote View**. The shared desktop is displayed in the web browser as a web page.



3. Use the following buttons when viewing the AM-101's output in a web browser:

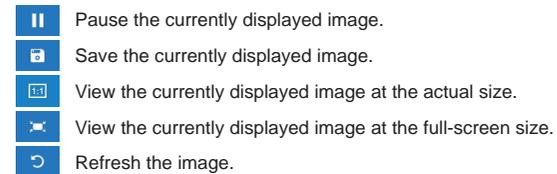

Pause the currently displayed image.

Save the currently displayed image.

View the currently displayed image at the actual size.

View the currently displayed image at the full-screen size.

Refresh the image.

Crestron software, including without limitation, product development software and product operating system software is licensed to Crestron dealers and Crestron Service Providers (CSPs) under a limited non-exclusive, non-transferable license pursuant to a separate end-user license agreement. The terms of this end-user license agreement can be found at [www.crestron.com/legal/software\\_license\\_agreement](http://www.crestron.com/legal/software_license_agreement).

The specific patents that cover Crestron products are listed at [patents.crestron.com](http://patents.crestron.com).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/open-source](http://www.crestron.com/open-source).

Crestron, the Crestron logo, and AirMedia are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. App Store, iTunes, and Mac are either trademarks or registered trademarks of Apple Inc. in the United States and/or other countries. IOS is either a trademark or registered trademark of Cisco Technology, Inc. in the United States and/or other countries. Android and Google Play are either trademarks or registered trademarks of Google Inc. in the United States and/or other countries. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Windows is either a trademark or registered trademark of Microsoft Corporation in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.  
© 2016 Crestron Electronics, Inc.