

DM-TX-201-C


DigitalMedia 8G+™ Transmitter 201

DO Mount the DM-TX-201-C

Mount the DM-TX-201-C onto a flat surface or rack rail as appropriate for the installation.


Mounting onto a Flat Surface

Using four mounting screws (not included), mount the DM-TX-201-C onto a flat surface such as a wall or a ceiling.

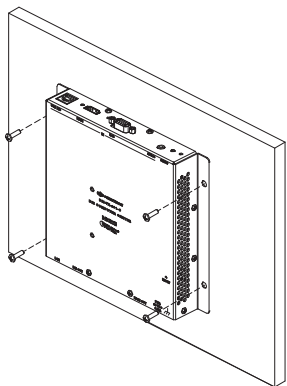

Mounting onto a Rack Rail

Using two mounting screws (not included), mount the left or right mounting flange of the DM-TX-201-C onto the front or rear rail of a rack.

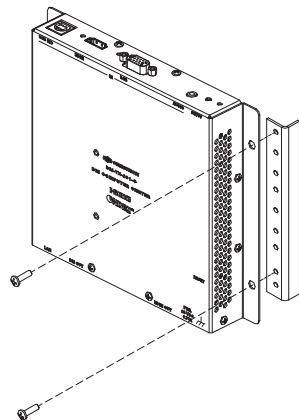

DO Check the Box

QTY	PRODUCT	PART NUM.
1	Power Pack, 24 Vdc 0.75 A, 100-240 Vac	2037209

Not Included: Cables, Rack Mount Screws, and Surface Mount Screws

DO Make Connections to the DM-TX-201-C

Make connections to the DM-TX-201-C as required for the application.

USB HID: Connect to the USB host interface of a computer or other USB HID-compliant host device (USB cable not included).

HDMI IN: Connect to an HDMI® audio/video source (HDMI cable not included).

RGB IN: Connect to an RGB (VGA) or component (YPbPr) video source (VGA cable not included).

AUDIO IN: Connect to an unbalanced audio source (unbalanced 3.5 mm TRS mini phone jack cable not included).

LAN: Connect to a local network device (Ethernet cable not included).

DM OUT: Connect to the DM 8G+™ input of a DigitalMedia™ switcher, a DigitalMedia 8G+™ receiver, or another DigitalMedia device, or connect to an HDBaseT® device (Crestron® DM-CBL-8G, DM-CBL, DM-CBL-D, or third-party CAT5e [or better] UTP or STP cables not included).


NOTE: The DM OUT port is a PoDM (Power over DM) and PoH (Power over HDBaseT) PD (Powered Device) port. To receive PoDM or PoH, the DM-TX-201-C requires a connection to a DigitalMedia switcher or other equipment that has a PoDM or PoH PSE (Power Sourcing Equipment) port. Any wiring that is connected to a PoDM or PoH PSE port is for intra-building use only and should not be connected to a line that runs outside of the building in which the PSE is located.

NOTE: The maximum cable length is 330 feet (100 meters) using DM-CBL-8G, DM-CBL, DM-CBL-D, or third-party CAT5e (or better) cable. Shielded cable and connectors are recommended to safeguard against unpredictable environmental electrical noise that may impact performance at resolutions above 1080p.

HDMI OUT: Connect to the receiving device (HDMI cable not included).

PWR 24 VDC 0.75A: (Make this connection only if the DM-TX-201-C is **not** to be powered using PoDM or PoH.) Connect to the included power pack.

(Ground): Connect to earth ground (building steel).

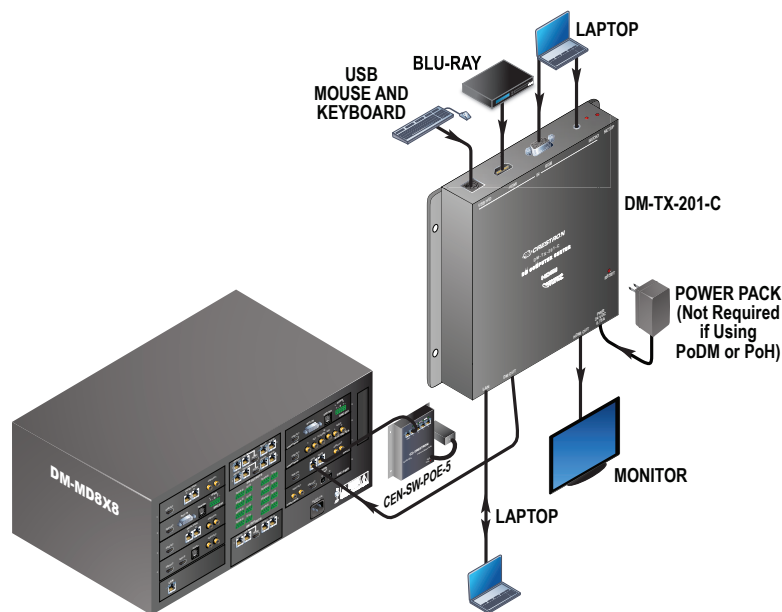

DO Set the IP Address

By default, DHCP (Dynamic Host Configuration Protocol) is enabled. If desired, you can assign the default IP address to a DM-TX-201-C that connects to a DigitalMedia receiver. To do so, hold down the **SETUP** button while the unit boots up. The default IP address, which is 192.168.1.236, overwrites the current setting. To manually set a different IP address, use Crestron Toolbox™.

NOTE: If the DM-TX-201-C connects to a DigitalMedia switcher, the DM-TX-201-C is configured by the switcher automatically. As a result, setup of the IP address is not required.

DO Learn More

Check the website for the latest firmware updates.

Crestron Electronics 15 Volvo Drive, Rockleigh, NJ 07647
888.CRESTRON | www.crestron.com



This product is Listed to applicable UL Standards and requirements by Underwriters Laboratories Inc.



As of the date of manufacture, the product has been tested and found to comply with specifications for CE marking.

Federal Communications Commission (FCC) Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following conditions:

(1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Industry Canada (IC) Compliance Statement

CAN ICES-3(B)/NMB-3(B)

The specific patents that cover Crestron products are listed at www.patents.crestron.com.

Product warranty can be found at www.crestron.com/warranty.

Crestron, the Crestron logo, Crestron Toolbox, DigitalMedia, DigitalMedia 8G+, and DM 8G+ are either trademarks or registered trademarks of Crestron Electronics, Inc., in the United States and/or other countries. HDBaseT and the HDBaseT Alliance logo are either trademarks or registered trademarks of the HDBaseT Alliance in the United States and/or other countries. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.

©2014 Crestron Electronics, Inc.