

WINDOW DISPLAY

HIGH TEMPERATURE & BRIGHTNESS SCREEN

CLASS

MODEL

47"

D471MAH(V1)

KEY FEATURES

- Special DOOH LCD Panel
- 2,000 nits High Brightness
- Prevents Blackouts
- 178° Wide Viewing Angle
- Auto Brightness Sensor Control
- Time On/Off Setting
- Remote Control (RS232)



Broadcast your branding with HYUNDAI Digital Signage!

According to the advanced product design, Hyundai Digital Signage Display meets necessary requirements for various digital signage solutions. Hyundai Digital Signage can be installed in any format such as portrait, landscape, single, multi and built-in delivering clear and bright images.



SPECIFICATIONS

Model	D471MAH(V1)	
Panel	Screen Size (diagonal)	47"
	Active Display Area (inch/mm)	40.93 x 23.02 / 1039.7 x 584.8
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	1.07B
	Brightness (cd/m ² ; typ.)	2,000
	Contrast Ratio	1200:1
	Response Time (ms; GTG)	10
	Viewing Angle	178°/178°
	Lifetime (hours)	50,000
	Backlight type	LED
Resolution	Monitor	1920 x 1080
	DTV	1080p
Input	1x VGA(D-Sub), 1x HDMI 1x DVI 1x IR 1x RS232C 1x PC Audio	
Output	1x DVI 1x IR 1x RS232C Audio Line Out Speaker (Ready)	
Power	Input Voltage	100 – 240V AC
	Power consumption	250 W
Features	Auto Cooling System	yes
	Auto Power Control (DPMS)	yes
	Tempered Glass	option
	Anti Reflection Coating	option
	Touch Screen	no
	Auto Brightness Sensor	yes
Operation	Temperature (°C)	0 - 40
	Humidity (%)	20 - 80
	OSD Language	10 Lang
Dimension	Set (W x H x D), inch/mm	42.28 x 23.76 x 4.23 / 1073.8 x 603.6 x 107.5
Bezel Size (U/D/L/R), inch mm	0.57/0.57/0.66/0.66 14.6/14.6/16.8/16.8	
Wall Mounting (WxH), mm	600 x 400/200	
Weight	Set (lb/kg)	70.55 / 32

FEATURES

Special Out-Of-Home LCD Panel

By using commercial grade LCD panels for Out-Of-Home applications, the HYUNDAI Digital Signage display can provide a higher brightness and contrast than standard LCD TV panels. Our LCD panel enables to operate for longer working time, deliver clear and bright image contents in the portrait or landscape format without any loss of quality.

High Brightness & Contrast


Achieving a brightness up to 2,000 cd/m² and working with a smart dynamic contrast technology, the special Out-Of-Home panels ensure bright and sharp pictures with a facsimile depth, even in bright enlightened environments.

High - Temperature Panel

HYUNDAI's new liquid crystal of high temperature panel have not blackout under 105°C. This prevents so called "blackout", caused by overheating, and makes it suitable for installation sites which are characterized by high temperature, bright ambience and direct sun light.

DIMENSIONS

D471MAH(V1) [unit: mm]

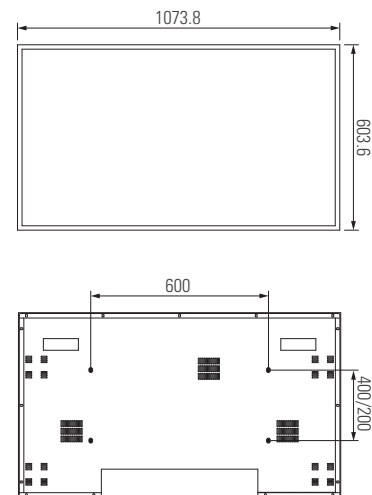

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE; MAY. 2014

HEAD OFFICE - HYUNDAI IBT CO., LTD.

106, Apogongdan-gil, Gimche on-si, Gyeongsangbuk-do,
740-862 The Republic of Korea
Tel. +82 54 430 6426 E-mail: prio123@hyundaiibt.com
www.hyundaiibt.com

HYUNDAI IT AMERICA CORP.

2051 Junction AVE., Suite 112 San Jose, CA 95131, USA
Tel. +1 408 954 8920 email : sales@hyundaita.com
www.hyundaita.com

HYUNDAI IT EUROPE GMBH

Siemensstrasse 22, 63225 Langen, Germany
Tel. +49(0) 6103-38878-100 email : info@hyundait.eu
www.hyundait.eu

HYUNDAI IT JAPAN

Kawaziri Bldg 2F, 534 Waseda Tsurumaki-cho,
Shinjuku-ku, Tokyo, Japan
Tel. +81-3-6273-9652 email : sales@hyundait.co.jp
www.hyundait.com